






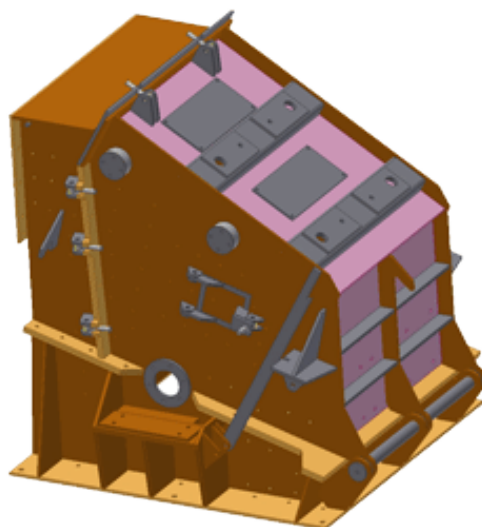


BROYEUR A PERCUSSION SECONDAIRE

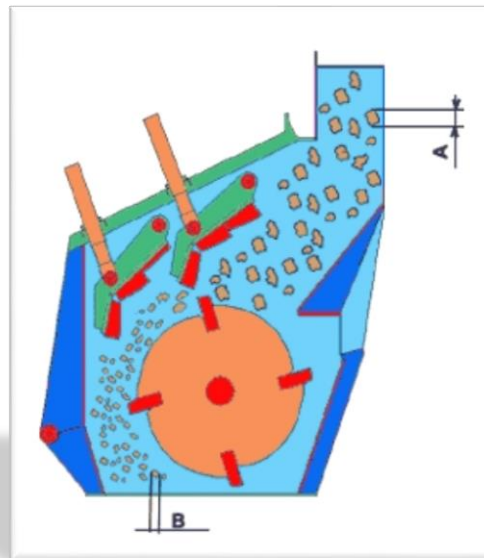



Broyeur à percussion secondaire

Type	L X H (Bride d'entrée) 	A max 	B min B max 	Ø x LG 	Puissance broyeur (kW)	Production 	Poids 	Nombre de battoirs
525	500 x 250	80	15 - 40	500 x 1000	45 - 60	30 - 60	4 200	4
825	860 x 300	120	20 - 50	860 x 1000	60 - 110	50 - 100	5 900	4
1035	1000 x 300	200	20 - 60	1000 x 1100	110 - 160	100 - 150	8 000	4
1255	1250 x 500	250	20 - 60	1250 x 1200	160 - 200	150 - 220	16 500	4
1405	1400 x 500	300	25 - 80	1400 x 1200	160 - 250	180 - 280	20 800	4
1606	1600 x 600	350	25 - 80	1600 x 1350	200 - 330	200 - 350	28 500	4
2006	2000 x 600	400	25 - 100	2000 x 1350	250 - 400	250 - 400	36 400	4